

Compact, fully electric motion-compensated gangway for the next generation of offshore access

Available for rental, the fully electric Safeway **Eagle** extends the fleet's capabilities with a lightweight, zero-emission design for smaller vessels. Fully electric and weighing only 45 tons, it combines sustainability, performance and simplicity in one compact design. Developed from the proven Safeway Seagull platform, the Eagle delivers class-leading workability and efficiency for smaller PSVs and mini-SOVs, offering fast, safe and emission-free transfers in any sea state.

Mini SOV / PSV

| | |
|------------------|---------------------------------|
| Drive: | Full electric |
| Reach: | Vertical 25 m / Horizontal 27 m |
| Capacity: | 4 pax / 1000 kg cargo |
| Profile: | Lightweight & sustainable |

Key Features

- **Fully electric drive** – zero-emission and energy-efficient operation
- **Lightweight design (≈ 45000 kg)** for smaller vessels and easy retrofit
- **Workability up to Hs 2.5 m**, extending weather windows
- **Outreach 27 m horizontal / 25 m vertical**, ideal for reaching up and far
- **3D hoist up to 1000 kg** with remote hook release
- **Four-person personnel cabin** for flexible operations
- **Plug-and-play mobilisation / demobilisation** within hours
- **BV class approved** for worldwide use
- **Ship to ship operation**




Electric by design. Efficient by nature.

Combining a compact footprint with high reach and zero emissions, the Safeway Eagle sets a new benchmark for sustainable offshore transfer, ready for the next generation of offshore energy.

Technical Specifications **Safeway Eagle**

| Parameter | Specification |
|------------------------------------|-----------------------------|
| Drive system | Fully electric |
| Total weight | ≈ 45000 kg |
| Max. reach (horizontal / vertical) | 27 m / 25 m |
| Personnel transfer | 4 persons per lift |
| Cargo capacity | 1000 kg (3D hoist offshore) |
| Workability | Hs = 2.5 m |
| Power supply | 400 – 690 V / 3 ph / 60 Hz |
| Temperature range | - 20 °C to + 55 °C |
| Power consumption | < 100 kW (normal operation) |

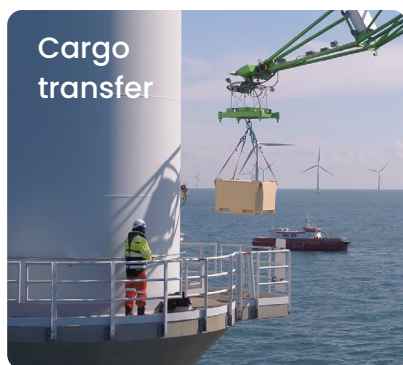

Safeway B.V.

Baanhoekweg 16, 3313 LA Dordrecht, The Netherlands

info@safewaygangway.com

www.safewaygangway.com

PART OF  **VAN AALST GROUP**

SAFEWAY
MOTION COMPENSATED GANGWAYS

Safeway B.V. operates under the certified Quality, Health, Safety and Environmental management systems of the Van Aalst Group (ISO 9001, ISO 14001, ISO 45001).

